



Oficinas hall

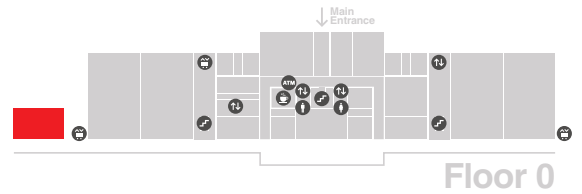


m²	375
m	25 x 15
m	6
	Epoxy
	350
	210
	75
	90
	348
	600

Characteristics

- Direct access to the quay
- Possibility of entrance of vehicles
- Possibility of total blackout
- Soundproofing
- Support area for catering
- Electric power: see plan
- Internet: Wireless and 1 fixed access point (see plan)

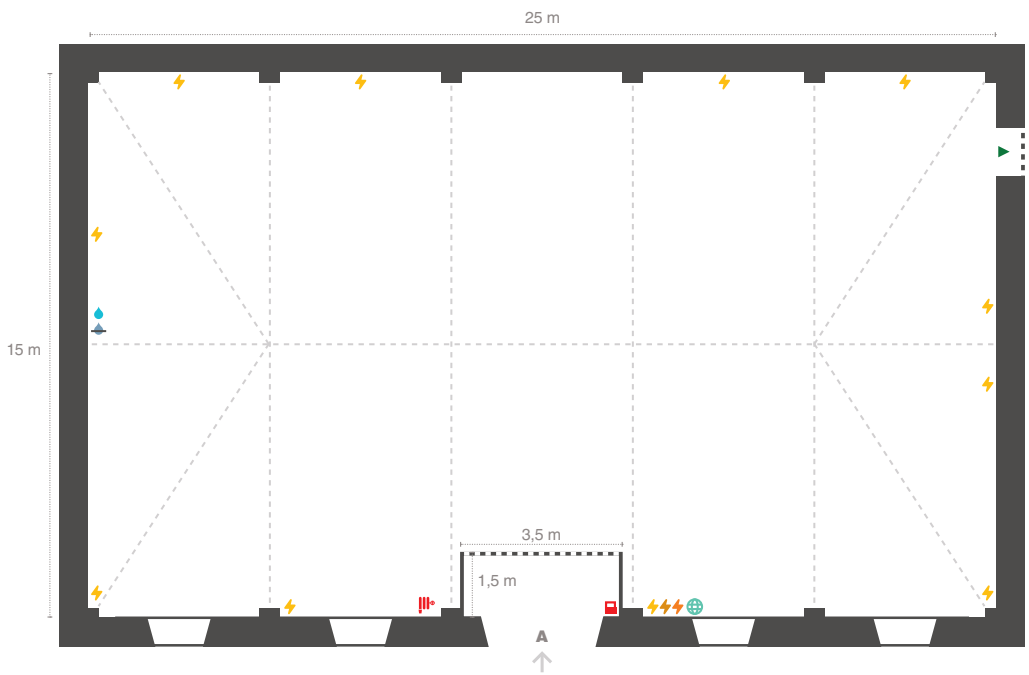

- Access
- Beams
- ⚡ 63 A three-phase socket
- ⚡ 32 A three-phase socket (25 A protection)
- ⚡ 16 A single-phase socket
- 🌐 Internet socket (RJ45)
- 🚒 Fire hydrant
- 🚒 Central fire alarm
- ➡ Emergency Exit
- 💧 Water point
- ⚡ Drainage

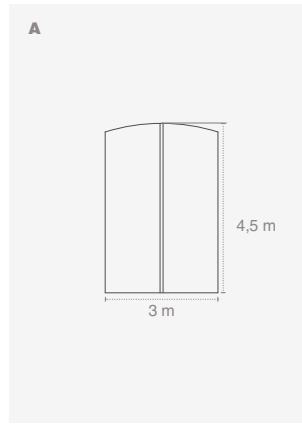

⊘

It is forbidden to apply adhesive or any other fixing system that damages the floor. Please, use paper tape before any other type of tape.

It is forbidden to stick any kind of object on the walls or beams.

!

The maximum capacities of the rooms have been calculated with the greatest use of space in mind, so they may vary depending on the layout chosen.

The suspension of infrastructures, such as truss, lighting, projection, sound systems, and others must always be pre-approved by the Congress Centre.

Be careful when passing heavy materials (pallet trucks, lifting platforms, etc.) over floor boxes.

The facilities must be handed over in the same conditions as before.